



Liquid De-icer for De-Icing, Anti-icing and Pre-wetting at Extremely Low Temperatures

Road Guard™ Plus 8 is a corrosion inhibited liquid form of calcium chloride and magnesium chloride brine developed especially for de-icing, anti-icing, and pre-wetting at extremely low temperatures (down to -49°F). The active ingredients for Road Guard™ Plus 8 are 26.5% calcium chloride, 3.1% magnesium chloride, 2.2% alkaline chlorides including sodium chloride and potassium chloride, 8% highly effective corrosion inhibitors. The corrosion rate is 85% lower than sodium chloride.

Quick Facts About Road Guard™ Plus 8

- Use as a stock-pile treatment.
- Can be blended with salt brine.
- Ability to melt snow and ice below -49°F (-45°C).
- Requires a minimum amount of agitation or recirculation while in storage.
- 85% less corrosive than rock salt, or sodium chloride.
- Environmental friendly product.
- Molasses is used as a major ingredient of corrosion inhibitor in Road Guard™ Plus 8.
- Available in totes, tankers or rail car.

Application Rates Recommendation

As an anti-icer / de-icer, Road Guard™ Plus 8 is typically applied at rates of 6-8 gallons per lane mile. The end user is recommended to adjust application rates based on weather conditions, level of service goals and experience. As a pre-wetting agent, Road Guard™ Plus 8 is typically used at rates of 3 – 5 gallons per ton of salt or sand.

Composition

Calcium Chloride, CaCl ₂	26.5 %	Corrosion Inhibitors (Sugar Cane	
Magnesium Chloride, MgCl ₂	3.1 %	Molasses and other Ingredients) . . .	8.0%
Sodium Chloride, NaCl	1.3 %	Total Chlorides Content	31.8%
Potassium Chloride, KCl	0.9 %	Total Active Ingredients	36.0%



Road Guard™ Plus 8

Physical Properties

Appearance Brown Liquid
Odor Slight
Specific Gravity 1.330 kg/litre
Freezing Point Free of solid down to -49°F (-45°C)
pH 6.5
Miscibility with water Complete


Test Results

Constituents Analysis by Levelton Engineering, Sept. 1/04

	Constituents	Road Guard Plus (ppm)	PNS Specifications (ppm), Modified June, 2004	
1	Phosphorus	16	2500	Pass
2	Cyanide	0.16	0.2	Pass
3	Arsenic	<2.0	5	Pass
4	Copper	0.33	1	Pass
5	Lead	<0.5	1	Pass
6	Mercury	<0.01	0.05	Pass
7	Chromium	0.28	1	Pass
8	Cadmium	<0.02	0.2	Pass
9	Barium	53	100	Pass
10	Selenium	<1	5	Pass
11	Zinc	1.5	10	Pass

Road Guard™ Plus 8

Phase Diagram of Road Guard™ Plus 8

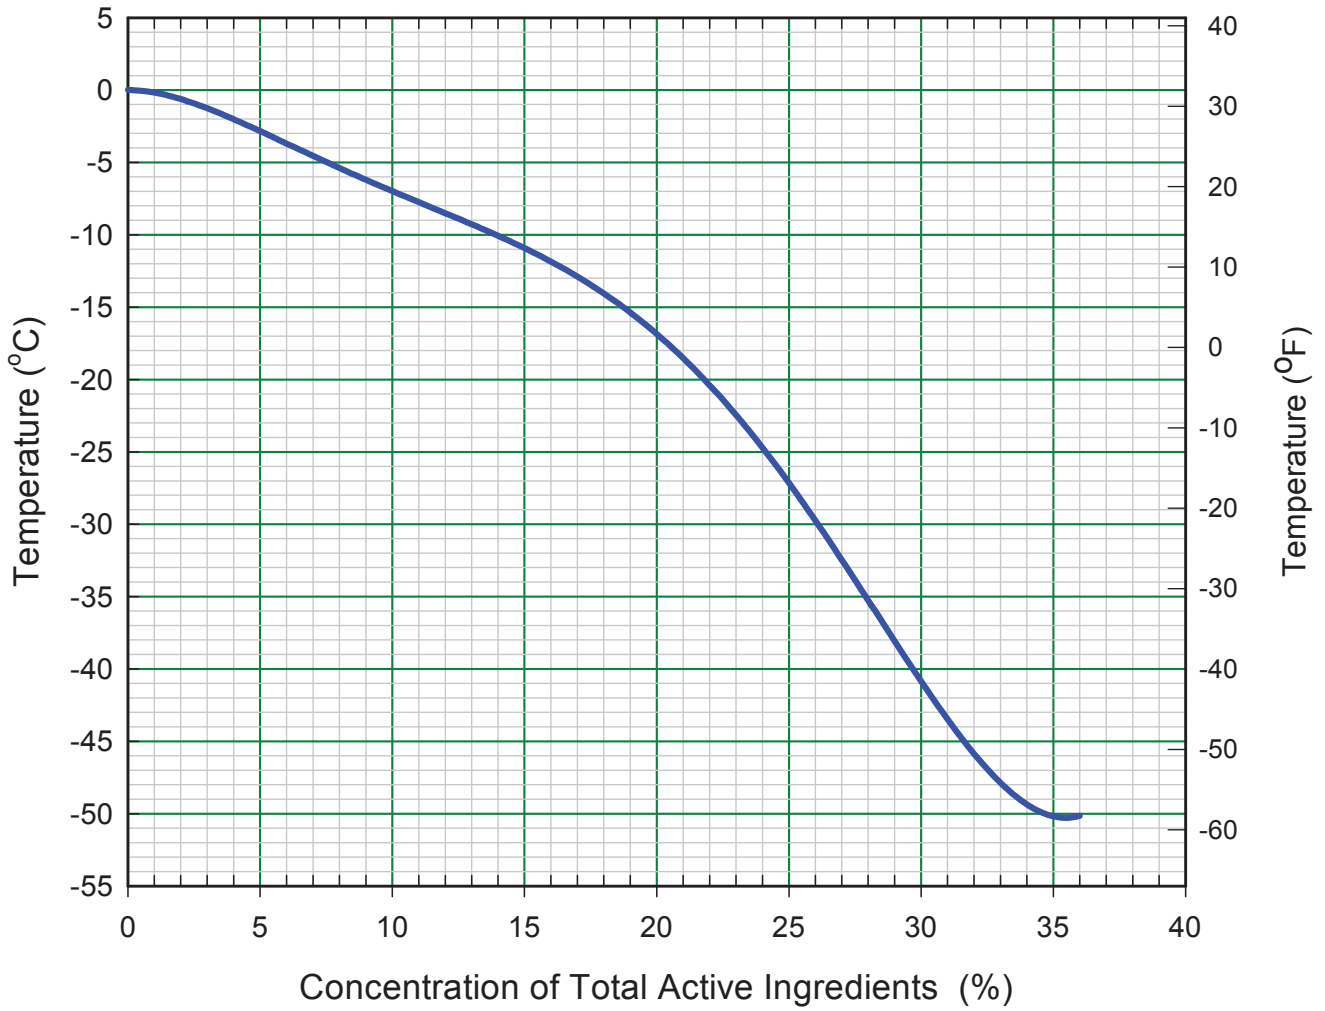


Road Guard™ Plus 8

Freezing Points of Road Guard™ Plus 8

Percentage of Total Active Ingredients %	Specific Gravity at 15° C	Freeze Point	
		°C	°F
0	1.000	0.0	32
2	1.014	-0.6	30.9
5	1.036	-2.8	26.9
6	1.043	-3.7	25.4
7	1.051	-4.5	23.8
8	1.059	-5.4	22.3
9	1.067	-6.2	20.8
10	1.074	-7.0	19.4
11	1.082	-7.8	18.0
12	1.091	-8.5	16.7
13	1.099	-9.3	15.3
14	1.107	-10.1	13.9
15	1.116	-10.9	12.3
16	1.124	-11.9	10.7
17	1.133	-12.9	8.8
18	1.142	-14.1	6.7
19	1.151	-15.4	4.3
20	1.160	-16.8	1.7
21	1.169	-18.5	-1.3
22	1.179	-20.4	-4.7
23	1.189	-22.4	-8.4
24	1.198	-24.7	-12.5
25	1.208	-27.1	-16.9
26	1.219	-29.7	-21.5
27	1.229	-32.5	-26.5
28	1.239	-35.3	-31.5
29	1.250	-38.1	-36.6
30	1.261	-40.9	-41.6
31	1.272	-43.5	-46.3
32	1.283	-45.9	-50.6
33	1.295	-47.9	-54.1
34	1.307	-49.3	-56.8
35	1.318	-50.1	-58.2
36	1.330	-50.2	-58.4

Road Guard™ Plus 8

Viscosities of Road Guard™ Plus 8 at Different Temperatures

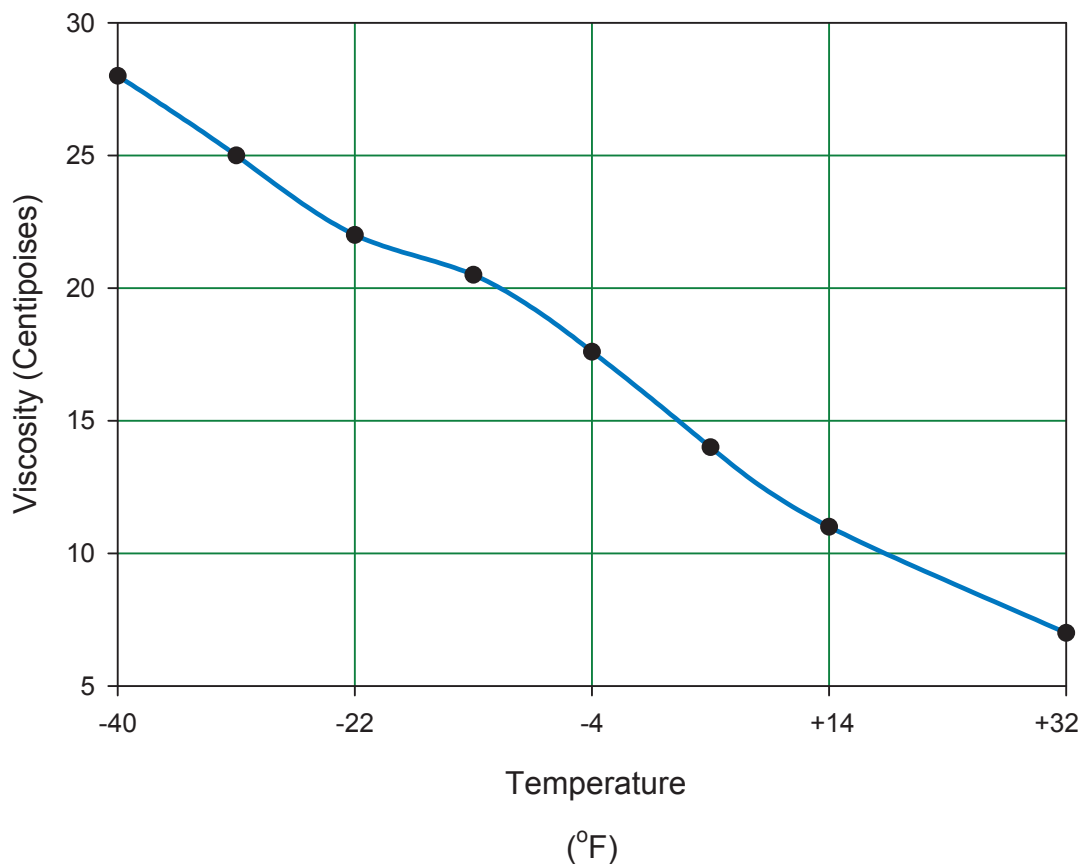

Temperature	Viscosity
°F	Centipoise
-40	28
-31	25
-22	22
-13	20.5
-4	17.6
+5	14
+14	11
+32	7